
dyson lightcycle morph floor

TECHNICAL SPECIFICATION



FRONT ELEVATION SIDE ELEVATION

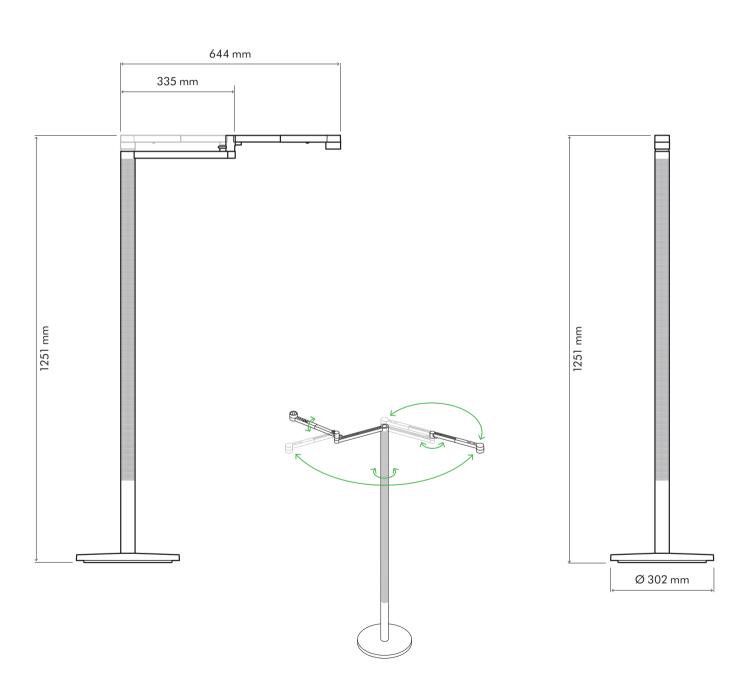

Dimensions with arm not extended

Height 1251 mm Width 302 mm Depth 465 mm

dyson lightcycle morph floor

Electrical

Input voltage / Frequency: 100-240V 50/60Hz

Rated power exc USB-C: 11.2W Rated power inc USB-C: 25W Power supply cord length: 3.2m

Electrical class: Class III

Optical

Light source: LED
Light output: 850lm'
Light output ratio: 80%
Luminous efficacy: 75lm/w
LED life time: 181,000 hours²
Colour temperature: 2700K – 6500K

CRI: 90 or over

Standby power consumption: <0.5W

IP rating: Indoor use only

Operating temperature range: 0-40°C, 32-104°F

Flicker: <1%

Features

USB-C charging point: 1.5A at 5V Bluetooth® wireless technology

Construction

Materials: Aluminium / Copper / Steel / Polycarbonate Plastic

Operation

Precision dimming

Logistics

Net weight: 6.1kg Packaged weight: 11.95kg


Packaged dimensions: 1320 mm (L) x 440 mm (W) x 115 mm (H)

Accreditation

Complies with
UL 153
CSA C22.2.#250.4
IEC/EN 60598-1, IEC/EN 60598-2-4
GB 7000.1,GB7000.204; GB4943.1
IEC 60598-1, IEC 60598-2-4

Standard guarantee

5 year (parts only)

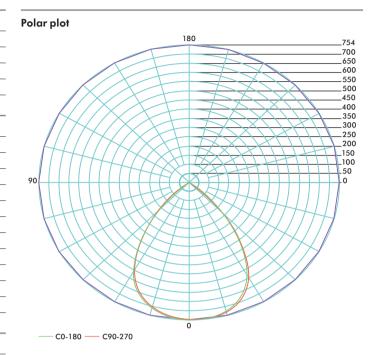

Product range

White/Silver

Black/Black



Website: www.dyson.co.uk/commercial

^{1.} Values may vary in real life and with Correlated Colour Temperature (CCT) setting. 2. LED-life calculation is based on L70 measurement according to IEC 62717, with an estimation of 8 hours' usage per day. Real-life results may vary. 3. Tested at full brightness according to IEEE 1789 - 2015 - Recommended Practices for Modulating Current in High-Brightness LEDs for Mitigating Health Risks to Viewers.